


◆ Pro Cup floor watering system ◆

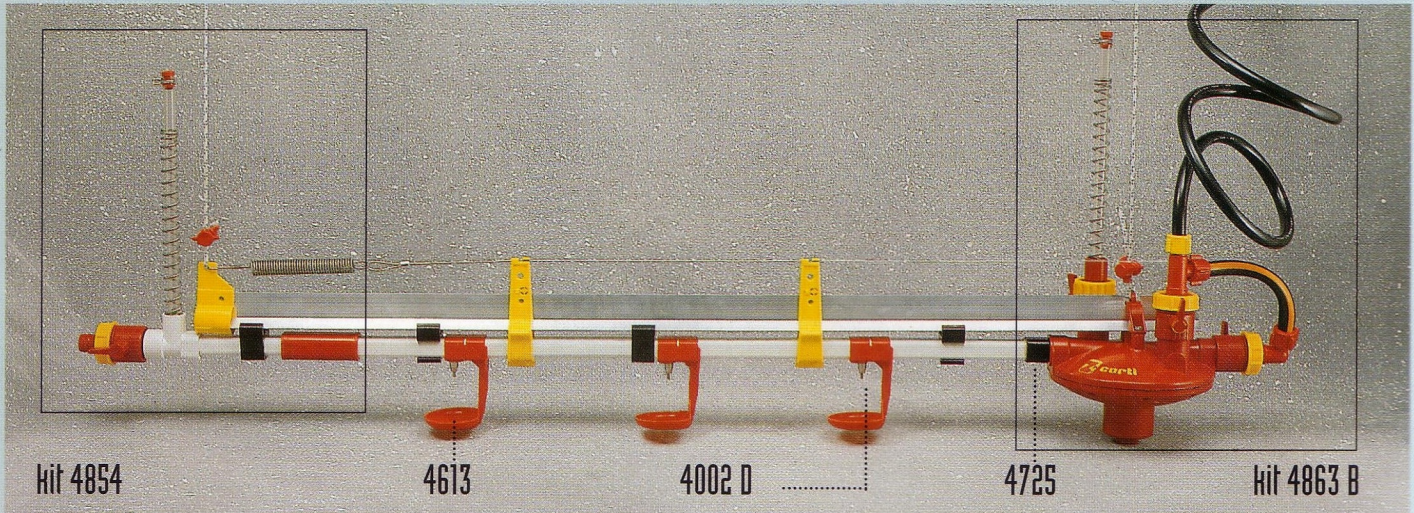

Kit 4854
End line kit for square pipe with tap and hose connector.

4613
One arm drink cup, assures the maintenance of dry litter capturing excess drops of water.

4002 D
Stainless steel nipple 360° side-action with double seal.

4725
Head connector ø 26.6 mm. for square PVC pipe to pressure reducer.

Kit 4863 B
Water supply kit with pressure reducer and by-pass for high pressure flushing.

4368

Square pipe slide connector.

4101

Square PVC pipe 22x22 mm.; it is normally sold with the valve just inserted every 15, 20, 25, 30, 37.5 cm. according to the type, dimension and number of birds in the house.

4950


Half hanger bracket.

4989

Connector aluminium T stabilizer profile on to square pipe.



THE LINES OF THE PRO CUP SYSTEM ARE AVAILABLE IN 3 MT. SECTIONS. AN ALUMINIUM T BAR, # 4990, OR A GALVANIZED STABILIZER TUBE, # 4735, ARE USED AS SUPPORT. NORMALLY THEY ARE PLACED AT INTERVALS BETWEEN THE FEEDER LINES. AS A GUIDELINE REFER TO THE FOLLOWING TABLE :

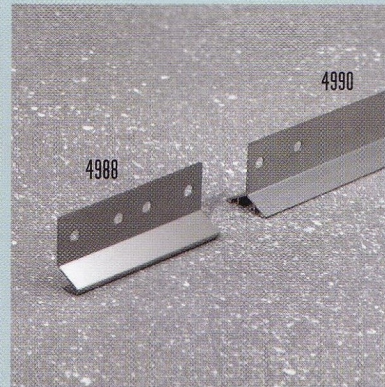

HOUSE WIDTH:	
UP TO 10 MT. (33')	= 3 LINES
UP TO 10-12 MT. (33'-40')	= 4 LINES
UP TO 12-16 MT. (40'-53')	= 5 LINES

4990

Aluminium T stabilizer profile of 3 mt. for supporting the square pipe. It allows 3 mt. intervals between hangers.

4988

Half-galvanized connector for aluminium T profile.

9006 14

Nut M6

9006 R 14

Screw M 6x16

4737

Antirust galvanized steel cable ø 1.6 mm.

One drinker for every 15 broilers, 12 layers or breeders.

The Pro Cup nipples are made of high quality stainless steel, have a watertight seal with no gasket, are reliable and practically indestructible. This system also allows day old chicks to drink easily. The high water-flow of this nipple quenches the birds' thirst within a short period of time.

◆ Winching lifting system ◆

4715

Galvanized steel cable ø 4 mm.; its particular stiffness allows proper level calibration.

4718

Polyester rope ø 3.9 mm.

4860

Lifting kit for drinking lines. Using handwinches and pulleys ensures rapid lifting of the drinker lines. This allows easy access to the growing area during cleaning operations. The cable can be positioned in order to work in every direction due to the particular articulation of the pulley ø 90 mm.



4746

Plastic screw clamp.

4747

Cable screw clamp with washer for steel cable. Rapid and useful for easy assembling.

4719

Pulley ø 60 mm. in autolubricating material that allows heavy liftings, suitable for feeding lines.