


◆ Snap floor watering system ◆

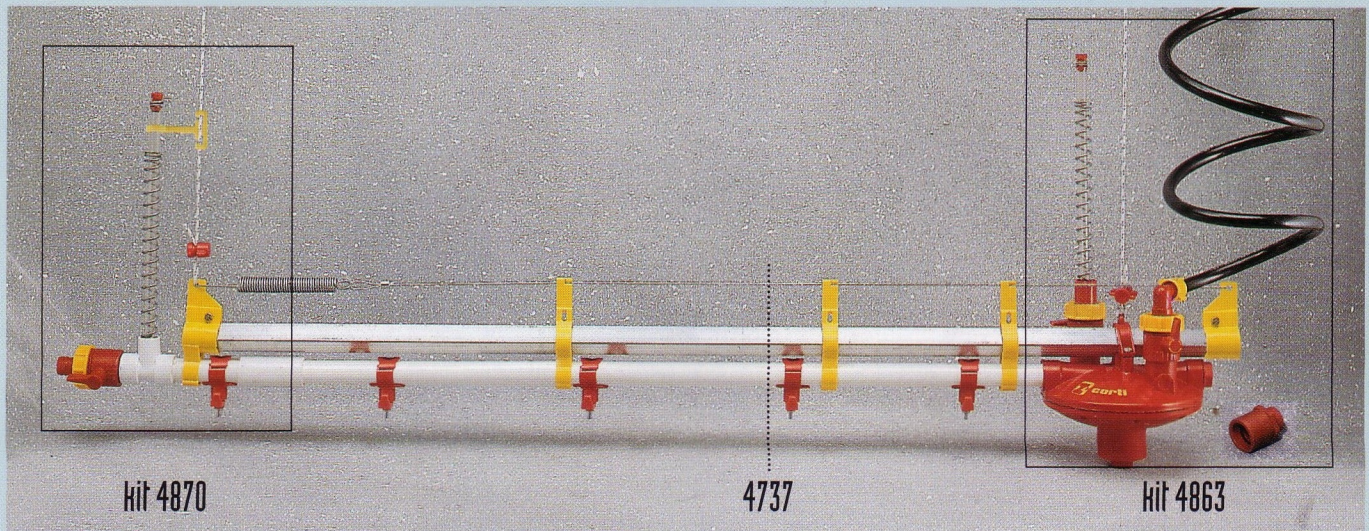

End line kit for round pipe with tap. Supplied with supporting spring and transparent check hose with float ball. It can be turned 180° at the cycle end in order to lift the lines up to the ceiling.

Anti-rust galvanized steel cable ø 1.6 mm.

Water supply kit with pressure reducer, without by-pass.

4731 G

Snap drinker with saddle for round pipes ø 26.6 mm. High quality stainless steel and seal without spring or washer. It offers absolute safety and its quality remains invariant for years. Snap system allows day old chicks to drink easily; the amount of water flow assures the litter remains dry. The cup is no longer needed and this system has proven to be the cleanest.



4736 T3000P200

Round PVC pipe ø 26.6 mm. with holes for the drinker lodging every 15, 20, 25 and 30 cm. depending on the density and kind of birds.

4733 T

Slide connector for round pipe ø 26.6 mm. Easily connects the tubes solving possible dilatation problems.

4742 T

Hanger bracket for round PVC pipe ø 26.6 mm. and galvanized hanger pipe 25x25 mm. or ø 26.6 mm. to be placed in 60 cm. intervals.



47353000

Galvanized stabilizer bar 25x25 mm. Allows support at 3 or 4 mt. intervals.

4732 L

Galvanized U connector for bar # 4735.

THE WATER PIPE LINE IS AVAILABLE IN 3 MT. SECTIONS WHICH ARE JOINED WITH A PIPE CONNECTOR. NORMALLY THE NUMBER OF DRINKER LINES IS REPRESENTED BY THE NUMBER OF FEED LINES PLUS ONE. AS A GUIDELINE REFER TO THE FOLLOWING TABLE:

HOUSE WIDTH :	
up to 10 mt. (33')	= 3 LINES
up to 10-12 mt. (33'-40')	= 4 LINES
up to 12-16 mt. (40'-53')	= 5 LINES

One drinker can serve 12 broilers or 10 breeders.

